

540441

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



Rec'd PCT/PTO 20 JUN 2005



(43) International Publication Date  
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number  
WO 2004/057891 A1

(51) International Patent Classification<sup>7</sup>: H04Q 7/32

(21) International Application Number:  
PCT/IB2002/005553

(22) International Filing Date:  
20 December 2002 (20.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): NOKIA CORPORATION [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ROTER, Martin [DE/DE]; Ruhrstrasse 16a, 45879 Gelsenkirchen


(DE). JURASCHEK, Andreas [DE/DE]; Gotfried-Keller-Strasse 1, 45721 Haltern (DE). FREYER, Andreas [DE/DE]; Schürferstrasse 54, 44269 Dortmund (DE). ROES, Thomas [DE/DE]; Königsberger Strasse 5, 46238 Bottrop (DE). JAKOBSEN, Jens [DK/DE]; Untere Heidestrasse 28, 44793 Bochum (DE). PERTZ, Uwe [DE/DE]; Breslauer Strasse 18, 50126 Bergheim (DE). ROWLAND, Steven [GB/DE]; Untere Heidestrasse 65, 44793 Bochum (DE). HILTUNEN, Miska [FI/DE]; Breite Strasse 86a, 58452 Witten (DE). HELMINEN, Ilpo [FI/DE]; Mont-Cenis Strasse 214b, 44627 Herne (DE).

(74) Agent: WAGNER, Bernhard, P.; Patentanwälte ter Meer Steinmeister & Partner GbR, Association No. 6, Mauerkircherstrasse 45, 81679 München (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,

[Continued on next page]

(54) Title: COMMUNICATION SYSTEM AND METHOD FOR OPERATING SUCH A SYSTEM

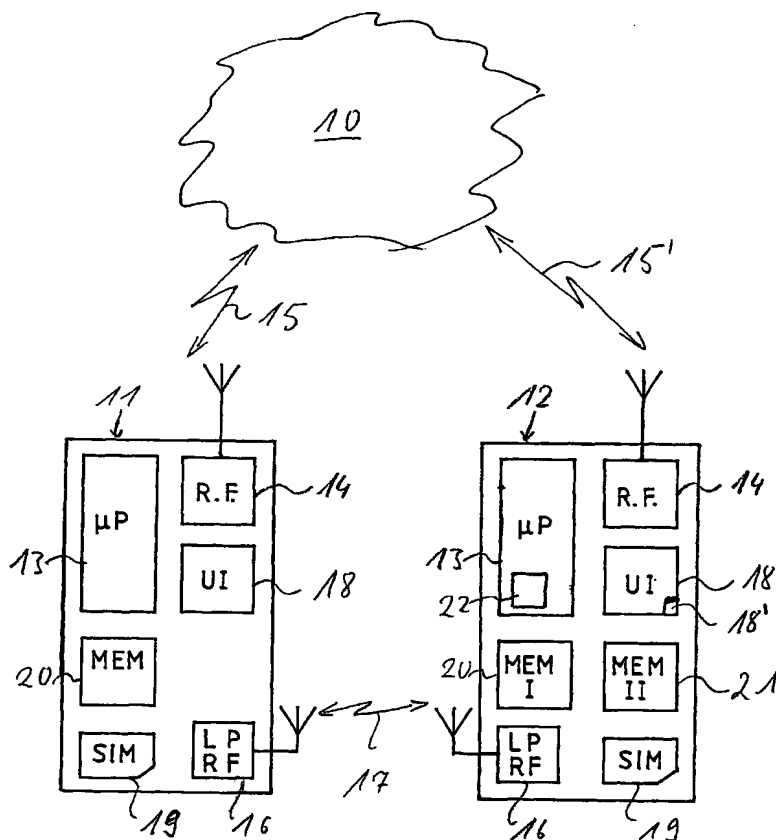

(57) Abstract: The present invention relates to communication system comprising first and second communication devices (11,12) each capable of communicating with a telecommunications network (10), and both being connectable to each other by a data link (17) for information transfer and to a method for operating the same. The first communication device (11) contains individual information. and the second communication device (12) comprises a special memory area (21) for storing individual information acquired from the first communication device (11). To enable an improved and facilitated usage of the system comparator means (22) for comparing the individual information contained in the first communication device (11) with that stored in the special memory area (21) of the second communication (12) device are provided. Therefore. only changes of the individual information of the first communication device (11) are stored in the second communication device (12) after comparing the individual information from the first communication device (11) stored in the second communication device (12) with the individual information in the first communication device (11) when the first communication device (11) is connected again to the second communication device (12).

WO 2004/057891 A1



LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,

TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# 1      **Communication System and Method for Operating such a System**

### Description

5     The present invention relates to a communication system comprising first and second communication devices each capable of communicating with a telecommunications network, and both being connectable to each other by a data link for information transfer as well as to a method for operating such a system.

10 WO 02/089449 A2 discloses a radiotelephone system including a first and a second radiotelephone, e.g. a mobile telephone and a car telephone, wherein the second radiotelephone if connected to the first radiotelephone can use SIM information and actual connection parameters of the first radiotelephone  
15 to establish a connection to a telecommunications network without going through the usual channel searching procedures etc. Therefore, a connection of the first radiotelephone to the telecommunications network can be switched over to the second radiotelephone.

20 Thus, a user of a telecommunications network who owns e.g. a mobile telephone and a car telephone can use his/her car telephone in his/her vehicle instead of his/her mobile telephone after switching over the connection, but can be contacted by anyone using the subscriber number of the mobile telephone.

A similar radio system is known from WO 02/21867 A2 which is concerned with the management of portable radiotelephones which are equipped with functionality to allow them to communicate with one another using a local wireless connection, such as low powered radio frequency (LPRF) link, a Bluetooth connection, or other communication means such as an infra-red link. Through the wireless link, the radiotelephone is able to acquire information from the SIM contained in another radiotelephone which is in the coverage range of the wireless link functionality to enable the one radiotelephone to function as it had the SIM of the other radiotelephone inserted itself. Thus, the radiotelephone that uses SIM information of another telephone is regarded as the other telephone in a telecommunications network so that all calls made to the other radio telephone will be received by that using the in-

1 formation of the other telephone. Additionally any calls made by the one radio  
telephone will be as is made by the other radiotelephone and will be billed ac-  
cordingly. Furthermore, it has to be noted that the one radiotelephone may  
be used by more than one user each having her/his own (portable) radio tele-  
5 phone.

EP 0 406 985 B1 is concerned with a first mobile cellular radiotelephone and  
a second hand portable cellular radiotelephone that can be connected to the  
first radiotelephone via a fixed-wired electrical data link, an optical data link,  
10 or a radio data link.

When the two radiotelephones are connected with each other, the first one  
uses the subscriber number retrieved from a NAM (number assignment mo-  
dule that is comparable with a SIM (subscriber identification module)) of the  
15 second one whereas the R.F. circuits of the second one are switched off. Ac-  
cording to a specific embodiment information from the NAM of the second ra-  
diotelephone can be downloaded into a memory of the first one. A micropro-  
cessor of the first radiotelephone coupled to the NAM of the second radiotele-  
phone or the memory uses NAM information of the second one so that the  
20 first radiotelephone assumes the identity of the second radiotelephone.

In addition, both radiotelephones may be provided with a RAM for variable  
data like abbreviated dialing codes, frequently dialed telephone numbers, or  
other data. In this case, variable data stored in the RAM of the second radio-  
25 telephone can be downloaded into that of the first one and can be used with  
the first one after the first radiotelephone assumed the identity of the second  
one.

Furthermore, the Bluetooth SIM Access Profile (SAP) enables one mobile ra-  
30 diotelephone to get wireless, remote access to a SIM card inserted in another  
radio telephone when both radio telephones are in a Bluetooth range of less  
than 10 meter. This feature is a specific Bluetooth profile that is standardized  
in the BT SIG (Bluetooth Special Interest Group), car working group.

35 The principal operation according to this specific Bluetooth profile is: a first  
mobile radiotelephone is registered with identification information from a lo-  
cal SIM card in a cellular network, i.e. a radio communications network.

1 When a second mobile radio telephone comes into a range of approximately  
less than 10 meters (Bluetooth range) both radio telephones can enter either  
automatically or manually triggered a so called remote SIM mode. In this  
mode the first radio telephone with the local SIM card leaves the wireless net-  
5 work while the second radiotelephone can access the SIM card of the first ra-  
diotelephone remotely via a Bluetooth wireless data link. In addition, the first  
radio telephone deactivates all functions that are related to wireless commu-  
nication, i.e. deactivates the radio part thereof. Within this mode the second  
radiotelephone uses the SIM information acquired via the SIM access over  
10 Bluetooth to register with the same user identification in the cellular net-  
work. Finally the second radio telephone gets the active radiotelephone  
whereas the first radiotelephone remains passive as long as the remote SIM  
mode is active.

15 When the remote SIM mode is left both radio telephones are going back to lo-  
cal mode, in which the first radio telephone is now active again.

If the first radiotelephone is a mobile telephone and the second is a car tele-  
phone there is a seamless "hand over" from the mobile telephone radio part to  
20 the car telephone radio part when a user enters the car without using two  
different SIM cards. Since the mobile telephone gets active again when the re-  
mote SIM mode is left, there is a problem in case it is required to switch-off  
any radiotelephone, e.g. near at a patrol station, or other areas where explo-  
sive materials are handled, since a simple switch-off of the car telephone  
25 would not lead to switching-off all telephones because in this case both radio  
telephones would fall back to local mode, resulting in activating the mobile  
telephone again. Thus the mobile telephone would not been switched-off si-  
multaneously with the car telephone.

30 Another problem that might occur is a loss of received information if the ac-  
tive second radio telephone, e.g. a car telephone as less functionality than  
the first radiotelephone, e.g. a mobile telephone. The mobile telephone may  
be able to receive SMS, MMS, Calendar entries (vCal) and Business  
cards (vCard) and the like whereas the car telephone does not support such  
35 features. Therefore, received information according to these features may be  
lost.

1 Another problem occurs if a user of a first radio telephone who has to use the  
second radiotelephone instead of the first one wants to use his/her user spe-  
cific data in the form of contact cards, telephone book entries, calendar infor-  
mation, voice text, notes, and the like stored his/her mobile telephone when  
5 he/she has to use the car embedded radio telephone.

### Summary of the Invention

It is an object of the present invention to provide a communication system  
10 and a method for operating the same, that enables an improved and facili-  
tated usage of the system.

This object is achieved by the communication system of claim 1 and the  
methods of claims 3, 8, 12 and 14. Refinements and developments of the pre-  
15 sent invention are described in the respective depending claims.

According to the present invention the first communication device contains  
individual information, and the second communication device comprises a  
special memory area for storing individual information acquired from the first  
20 communication device as well as comparator means for comparing the indi-  
vidual information contained in the first communication device with that  
stored in the special memory area of the second communication device. As  
the data is copied from a mobile telephone to a special storage area in the car  
telephone, the data will not be mixed with the original data in the car tele-  
25 phone. Further, the user has access to the individual data of his/her tele-  
phone even if it is unreachable but wirelessly accessible.

To reduce the time needed for data transfer from the first to the second com-  
munication device upon connecting them again in case that the second com-  
30 munication device is to be used with different first communication devices,  
the special memory area comprises at least two separate portions for storing  
individual information of different first communication devices separately.

According to another aspect of the present invention a method for operating a  
35 communication system comprises the steps of:- storing individual information  
acquired from the first communication device in the second communication  
device so that the individual information from the first communication device

1 is directly accessible by the second communication device when the first and  
the second communication devices are connected to each other by the data  
link at the very first time, or - comparing the individual information from the  
first communication device stored in the second communication device with  
5 the individual information in the first communication device when the first  
communication device is connected again to the second communication de-  
vice, and - storing only changes of the individual information of the first com-  
munication device in the second communication device.

10 To ensure that information stored in the second communications device is  
prevented from unauthorized use, access to the individual information from  
the first communication device stored in the second communication device is  
prevented when the first and the second communication devices are discon-  
nected.

15 According to a preferred embodiment of the present invention, the individual  
information from a first communication device stored in the second communi-  
cation device is replaced by individual information from another first commu-  
nication device when the another first communication device is connected  
20 first to the second communication device. This is especially useful in case the  
second communication device is mounted within a rental car with multiple  
customers. In this case it possible to keep the rental car related information  
permanently stored in the second communication device whereas the user in-  
dividual information is stored in a separate memory area only as long as the  
25 same user is using the rental car and the second communication device  
thereof.

In case the second communication device is built in a vehicle used by a group  
of people, like a family the members of which share the vehicle or like the  
30 members of company using alternately the same company vehicle it is of ad-  
vantage if the individual information from another first communication device  
is stored in the second communication device separately from other individual  
information of other first communication devices when the another first com-  
munication device is connected first to the second communication device.  
35

To ensure that the individual information stored in the first communication  
device is the same as that stored in the second communication device at any

1 time the devices are connected with each other, changes of the individual in-  
formation related with the first communication device are stored in both the  
first and the second communication devices as long as the first and the sec-  
ond communication devices are connected to each other by the data link.

5

According to further aspect of the present invention a method for operating  
any kind communication system including at least one communications de-  
vice, comprises the steps of: - providing at least two logical communication  
devices in the communication device, - assigning the communication device  
10 to one of the at least two logical communication devices, and - storing indi-  
vidual information related to the communication device assigned to the one of  
the at least two logical communication devices to enable a personalized multi-  
user usage of the communication device. Thus, each user can input first and  
choose thereafter his/her personal telephone data (settings, phonebook en-  
15 tries etc.) without the need of reconfiguring the communication device (tele-  
phone) after it has been used by another user with other individual settings  
and the like. Consequently, it is possible to adapt the communication device  
(telephone) again to preferred settings or the way the user is used to use his/  
her telephone simply by selecting the respective individual information stored  
20 with regard to the respective logical communication device.

According to a preferred embodiment of the present invention, a first commu-  
nication device is connected to the second communication device assigned to  
one of the logical communication devices therein via a data link for  
25 information transfer, individual information of the first communication device  
is transferred to the second communication device as individual information  
related to the latter one, and the transferred individual information from the  
first communication device is stored in the second information device for be-  
ing used therein together with the assigned logical communication device.  
30 Thus, each user who owns a suitable mobile telephone is able to input his/  
her personal telephone data (SIM, settings phonebook etc.) stored in the mo-  
bile telephone via the data link so that these data is made available in second  
communication device in a convenient way.

35 For operating a communication system comprising first and second  
communication devices each capable of communicating with the telecommu-  
nications network, and both being connectable to each other by a data link



1 for information transfer, the present invention provides a method wherein the  
logical communication devices are provided in the second communication de-  
vice, wherein a first communication device connected to the second communi-  
5 cation device via the data link is assigned to one of the logical communication  
devices, and wherein individual information of the first communication device  
is transferred to the second communication device when the first and the  
second communication devices are connected to each other by the data link  
for being used in the second communication device together with the logical  
communication device assigned to the first communication device.

10 Therefore, the owner of a mobile telephone can use a second communication  
device in the same manner as his/her own mobile telephone wherein the sec-  
ond communication device adopts the identity of the first one. This is of ad-  
vantage because the user can be always called by another people using the  
15 phone number of his/her first communication device.

According to a preferred embodiment of the present invention, the informa-  
tion transfer is performed in response to a respective request input by the  
user.

20 Another embodiment of the present invention is characterized by keeping the  
connection between the first and the second communication devices active, if  
the second communication device, that is connected to the telecommunicat-  
ions network using the identity of the first communication device, is made  
25 passive to enter a stand-by mode in which the connection to the telecommu-  
nications network is interrupted, wherein entering the stand-by mode is pref-  
erably performed by actuating a specific input means. This makes sure that  
both radio parts can be reliably switched off simultaneously if necessary.

30 Another embodiment of the present invention is characterized by forwarding  
data that are received by the second communication device from the telecom-  
munications network to the first communication device via the data link, if  
the second communication device is connected to the telecommunications  
network using the identity of the first communication device, wherein forward-  
35 ing data from the second communication device to the first communication  
device is indicated to a user by the second communication device. In this way,  
data received by the second communication device is always made available

1 for the user in her/his first communication device. Forwarding data in any  
case, i. e. even if data was already presented or if data could not be processed  
or handled by the second communication device, improves the reliability of  
data reception and prevents particularly data loss in case the second commu-  
5 nication device includes less functionality than the first one.

### **Brief Description of the Drawings**

The present invention will be exemplarily described in more detail in connec-  
10 tion with the embodiment shown in the drawings. Wherein

**Figure 1** shows a schematic block diagram of a communication system ac-  
cording to the invention.

### **Detailed Description of Preferred Embodiments of the Invention**

As shown in Figure 1 the communication system according to the present in-  
vention comprises first and second communication devices 11, 12 each of  
which is capable of communicating with a telecommunications network 10.  
20

Each of the first and second communication devices 11, 12 comprises a con-  
trol unit 13, e.g. a microprocessor  $\mu$ P, a radio frequency R.F. part 14 for es-  
tablishing a radio link 15, 15' for communicating with the telecommunica-  
tions network 10, a low power radio frequency LPRF part 16 for establishing a  
25 data link 17 connecting the first and the second communication device, and a  
user interface 18. The user interface (UI) 18 of each communication device  
comprises input means for inputting user commands, e.g. the keypad, a turn-  
push button, a jog dial, a specific control bottom 18', an on/off-switch, voice  
recognition means and the like, and output means, like a display and a loud-  
30 speaker.

Further, the first communication device 11 is provided with a subscriber iden-  
tification module SIM, e.g. a SIM card 19 or any other identification means  
suitable for identifying a specific communication device as that of a specific  
35 subscriber, like a number assignment module NAM. The first communication  
device 11 further comprises a memory for storing user data like telephone  
book entries, contact cards, calendar information, SMS (short message serv-

1 ice) messages or information, voice text, notes and the like. This memory can be part of a SIM card 19 and/or a memory 20 provided separately from the SIM card 19 in the communication device 11.

5 The second communication device usually includes a SIM card 19 and a memory 20 (MEM I) like the first communication device. However, using the features of the remote SIM access profile the second communication device 12 does not necessarily needs its own subscriber identification module since it can use the subscriber identification information of a first communication device 11 when such a device is connected to the second communication device 12 via the data link 17 so that the second communication device 12 can obtain SIM information to establish a radio communication link 15' with the telecommunications network 10 and adapting the identity of the first communication device 11.

15 Furthermore, according to the present invention the second communication device 12 comprises a special memory area (MEM II) 21 for storing individual information acquired from the first communication device 11 as well as a specific comparator means 22 that can be included in the microprocessor of the control unit 13, e.g. as a specific application unit.

20 According to a first embodiment of the present invention the special memory area 21 is a specific area for storing individual information or user data from one first communication device 11 wherein the information and/or data stored in the special memory area 21 is only accessible as long as the respective first communication device 11 is connected to the second communication device 12 via the data link 17. As soon as the data link 17 is interrupted the special memory area 21 is prevented from any access to the information stored therein.

30 If another first communication device 11 is connected the first time the special memory area 21 is erased and new individual information acquired from the new first communication device 11 is stored in this special memory area 21.

35 According to another embodiment of the present invention the special memory area 21 comprises at least two separate portions for storing individual infor-

1       mation so that different portions of the special memory area 21 can be used  
for different first communication devices 11.

5       For describing the operation of the inventive communication system, it is as-  
sumed that the first communication device 11 is a portable radiotelephone or  
mobile phone whereas the second communication device 12 is a radiotele-  
phone or car phone fixed in a vehicle. However, the inventive communication  
system is not limited to such a scenario but includes all cases where a second  
10       communication device 12 that can be more conveniently used by a user than  
the first communication device 11 is available. For example, in case that a  
user owns two communication devices one of which is convenient to be car-  
ried on whereas the other is more convenient to be used in the user's office  
she/he can always use the user identification of his/her first communication  
device (e.g. a very small mobile phone) even if he/she uses her/his second  
15       communication device (e.g. a Nokia communicator) by using the subscriber  
identification of the first communication device with the second one.

Further, in the following description contact data is used as example. There  
are many other possible data that can be handled in the same way. If a user  
20       having a mobile phone as first communication device 11 enters a car in which  
a car phone is installed that is configured to be connected to another commu-  
nication device via a data link 17 in the same way as the mobile phone of the  
user the first and the second communication devices 11, 12, i.e. the mobile  
phone and the car phone are connected to each other by the data link 17.

25       If this connection between both devices is established the first time contact  
data contained in the mobile phone are copied from the mobile phone to the  
car phone and are stored in the special memory area 21. The data in this spe-  
cial memory area 21 are only available as long as the mobile phone, where the  
30       data originates from is connected to the car phone.

As long as the mobile phone is connected to the car phone the user can now  
opted to use the contact data of the mobile phone stored in the specific mem-  
ory area 21 or the contact data of the car phone stored in the corresponding  
35       memory area 20 thereof. It is important that only one data memory at a time  
is selected by the user. This can be a menu selection in the car phone user in-  
terface, for example. The active data store selection is important because it

1 has a special meaning when the specific memory area 21 is active. In this  
case all changes of contact data will be synchronized between the memories  
21, 20 of the communication devices 11, 12, i.e. the mobile phone and the car  
phone, continuously. Thus, if a contact is added using the car phone user in-  
5 terface 18 the resulting contact will be stored in the specific memory area 21  
and will be copied then automatically to the memory 20 of the mobile phone.

If the user leaves the car with his/her mobile phone the data link 17 will be  
terminated. Consequently, the data in the specific memory area 21 of the car  
10 phone is no longer usable, but these data is not erased. In particular, it has  
to be pointed out that the data in the special memory area 21 cannot be used  
as long as the communication device 11 the data originates from is not con-  
nected to the second communication device 12, i.e. to the car phone.

15 If the same mobile phone is connected again to the car phone via the data  
link 17 using the respective LPRF parts 16 the comparator means 22 of the  
control unit 13 compares the data stored in the special memory area 21 of the  
car phone with the data stored in the mobile phone to check whether or not  
the same information is stored in both memories 20, 21. If there are some  
20 changes of the information stored in the mobile phone only these changes are  
copied to the special memory area 21 of the car phone. Thus, instead of copy-  
ing all contact data from the mobile phone to the car phone these data are  
only synchronized so that the data memories are consistent thereafter. After  
the synchronization the operation continues as described above.

25 If another user enters the car with another mobile phone that can be con-  
nected to the car phone via a data link 17 the microprocessor or control unit  
13 of the car phone recognizes that the mobile phone connected to the car  
phone is connected the first time. Therefore, according to a first embodiment  
30 of the present invention the contact data of the new mobile phone is copied to  
the specific memory area 21 of the car phone so that the contact information  
originated from the former mobile phone is erased and replaced by that of the  
new one.

35 According to another embodiment of the present invention a specific part of  
the special memory area is assigned to the new mobile phone so that contact

1 information can be stored in another part of the specific memory area 21  
without erasing the contact information formally stored.

In this case it is not possible either to use contact data of a mobile phone that  
5 is not connected to the car phone.

Synchronization of data to make the data of a mobile phone stored in the mo-  
bile phone and the car phone consistent is performed in the same way as de-  
scribed above.

10 According to another embodiment of the present invention the second com-  
munication device is enabled to assign first physical communication devices  
11 or SIM cards 19 respectively to logical communication devices provided in  
the second communication device 12. In particular, the logical communication  
15 devices are stored in a special memory area of the second communication de-  
vice, e.g. in the special memory area 21, and include all data related with the  
communication device, e.g. telephone related data like user settings, tele-  
phone books, etc. In this way it is possible to provide a personalized multi  
user usage of a single radio telephone.

20 When a first communication device 11, e.g. a mobile telephone, is connected  
to a second communication device 12, e.g. a car telephone, via the data link  
17, the mobile telephone will be assigned to one of the logical communication  
devices within the second communication device 12, i.e. within the car tele-  
25 phone. Then, the corresponding telephone data of the mobile telephone, e.g.  
user settings and phone book entries, are transferred via the data link either  
automatically or in response to a corresponding command input by the user  
to the second communication device 12, i.e. to the car telephone to provide  
the user of the car telephone with all telephone related data known from his/  
30 her own mobile telephone.

In addition, it is also possible to assign one and the same first communication  
device 11 or one and the same SIM card 19 provided in the first or the second  
communication devices 11, 12 to different logical communication devices.  
35 Thus, it is possible to share a specific first communication device 11 or a mo-  
bile telephone or the local SIM card provided in the second communication

1 device 12, i.e. in the car telephone by several users with different user settings and phone books, so that each user can select his/her own settings.

5 In case, that the first communication device is a mobile telephone and the second communication device 12 is a car telephone as assumed above, the invention allows the seamless usage of the car telephone by a plurality of users who have different mobile telephones and/or different telephone data or preferred telephone settings. Each user can be provided with her/his personal phone data, e.g. SIM card, telephone settings, phone book etc., without the  
10 need of switching SIM cards manually or of reconfiguring the car telephone to adapt it to her/his preferred telephone settings or the way she/he is used to use her/his mobile telephone.

15 In case that a mobile telephone 11 is connected the first time to the car telephone either automatically or upon user request via the data link, all mobile telephone 11 related data are transferred to the car telephone. In the car telephone the mobile telephone related data are assigned to a specific logical telephone provided within the car telephone. Thereafter, the respective logical telephone can be automatically selected for further operating the car telephone so that the user of the mobile telephone can use the car telephone in  
20 just the same way as her/his mobile telephone.

If the mobile telephone is connected again to the car telephone the corresponding logical telephone that includes all mobile telephone related data can  
25 be selected automatically or upon user request.

In case that another mobile telephone of another user is connected the first time with the car telephone is another mobile telephone is assigned to another logical telephone within the car telephone. In this case the operation of  
30 the system is just the same as above.

However, it is also possible to prompt the user upon connecting a new mobile telephone to the car telephone to decide which logical telephone should be used with the new mobile telephone a specific logical telephone with given or  
35 new setting or another (new) logical telephone with no or default settings. If another logical telephone should be used individual data, in particular tele-

1 phone settings can be either retrieved from the new mobile phone or input by the user.

5 Furthermore, the local SIM card 19 of the car telephone 12 may be assigned to different logical telephones provided within the car telephone 12 so that different users of the car telephone can use the car telephone in a different manner without the need of having a mobile telephone available. In this case the telephone settings, telephone book entries have to be input via the user interface 18 of the second communication device. However, it is also possible  
10 to use the local SIM card 19 of the car telephone 12, but to input individual information, i.e. telephone settings, contact data, etc. via a data link 17 established between the car telephone and a mobile telephone 11 so that individual information provided in the mobile telephone 11 can be easily transferred to the car phone and can be used there together with the local SIM  
15 card 19.

Upon switching on the car telephone enters the operating state of the last operating period. If the car telephone was operated by a user A using the local SIM card 19 and settings A stored in the car telephone only (i.e. local settings), the car telephone enters the same state using the local SIM card 19  
20 and settings A again and preferably prompts the user to confirm the selected operating state or to choose another one. If the local SIM card 19 was used the last time together with settings provided by mobile telephone so that these settings are only accessible if the mobile telephone is connected via the data link 17 (remote settings, i.e. settings that may be stored in the car telephone or not, but be accessible only as long as the mobile telephone they are  
25 from is connected to the car the telephone), the car telephone tries to enter the corresponding operating state again. If in this case the corresponding mobile telephone is accessible via the data link 17 the operating state is regarded as confirmed. However, if the mobile telephone is not available the user is prompted to choose a suitable operating state, i.e. suitable settings. If  
30 the car telephone was used the last time with a remote SIM card 19 the car telephone 12 tries to get access to the respective SIM card 19. If the connection is built up successfully the car telephone operates with the identity according to the respective SIM card 19. Otherwise, the use is prompted to  
35 choose a suitable state.



1 In any case, i.e. using the local SIM card 19 with local settings or with remote settings or using a remote SIM card 19 is used telephone settings can be input or modified by the user via the user interface 18 of the car telephone.

5 According to another embodiment of the present invention, the second communication device 12, e.g. a car phone is provided with a specific stand-by mode that can be selected either by a manual selection using the menu of the user interface 18 or by a specific stand-by mode button 18' being a special part of the user interface 18.

10

If the stand-by mode is selected the connection between the first and the second communication devices 11, 12, i.e. the data link 17 is kept active whereas the radio frequency part 14 of the second communication device 12 is switched off so that both radio frequency parts 14 of the first and the second communication devices 11, 12 simultaneously are switched off. Thus, it is possible to deactivate the radio frequency parts 14 of both communication devices 11, 12 whereas the data link 17 is active to prevent particularly the first communications device 11 to start establishing a radio link 15 to the telecommunications network 10 in regions near a patrol station or the like where it is not allowed to use telecommunication devices.

To prevent data loss in case that the second communication device 12 has less functionality than the first communication device 11, like e.g. does not support calendar or MMS (Multimedia Messaging Service) features, the second communication device 12 comprises a functionality that forwards data that are received from the telecommunications network 10 to the first communication device 11 via the data link 17 in case that the second communications device 12 is connected to a first one and uses the identity of the first communications device 11. This way the user has always all received data on his first communication device. This feature is especially of importance if the second communication device cannot display or process the received data.

In this case it is preferred that it is indicated to the user that certain data was received by the second communication device 12 and forwarded to the first one so that the user is informed immediately and can choose whether or not he will have access to these data by disconnecting the first communication device 11 from the second one.

1 In this way data loss can be reliably prevented and the user will see received  
information or data in the same inbox as it would have received the informa-  
tion directly over the telecommunications network 10. Thereafter, normal  
5 processing and/or handling of the received data can be done in the usual  
way.

10

15

20

25

30

35

1

**Claims**

1. A communication system comprising first and second communication devices (11, 12) each capable of communicating with a telecommunications network (10), and both being connectable to each other by a data link (17) for information transfer, wherein
- the first communication device (11) contains individual information, and
  - the second communication device (12) comprises
    - a special memory area (21) for storing individual information acquired from the first communication device (11) as well as
    - comparator means (22) for comparing the individual information contained in the first communication device (11) with that stored in the special memory area (21) of the second communication device (12).
2. The communication system according to claim 1, characterized in that the special memory area (21) comprises at least two separate portions for storing individual information of different first communication devices (11) separately.
3. A method for operating a communication system comprising first and second communication devices (11, 12) each capable of communicating with a telecommunications network (10), and both being connectable to each other by a data link (17) for information transfer, in particular for operating a communication system according to any one of the preceding claims, characterized by:
- storing individual information acquired from the first communication device (11) in the second communication device (12) so that the individual information from the first communication device (11) is directly accessible by the second communication device (12) when the first and the second communication devices (11, 12) are connected to each other by the data link (17) at the very first time, or
  - comparing the individual information from the first communication device (11) stored in the second communication device (12) with the individual information in the first communication device (11) when the first communication device (11) is connected again to the second communication device (12), and

1       -     storing only changes of the individual information of the first communi-  
cation device (11) in the second communication device (12).

4.     A method for operating a communication system according to claim 3,  
5     characterized in that access to the individual information from the first com-  
munication device (11) stored in the second communication device (12) is pre-  
vented when the first and the second communication devices (11, 12) are dis-  
connected.

10    5.     The method for operating a communication system according to claim 3  
or 4, characterized in that

15       -     the individual information from a first communication device (11) stored  
in the second communication device (12) is replaced by individual information  
of another first communication device (11) when the another first communica-  
tion device (11) is connected first to the second communication device (12).

6.     The method for operating a communication system according to claim 3  
or 4, characterized in that

20       -     individual information from another first communication device (11) is  
stored in the second communication device (12) separately from other individ-  
ual information of other first communication devices (11) when the another  
first communication device (11) is connected first to the second communica-  
tion device (12).

25    7.     The method for operating a communication system according to any one  
of claims 3 to 6, characterized in that changes of the individual information  
related with the first communication device are stored in both the first and  
the second communication devices (11, 12) as long as the first and the second  
communication devices (11, 12) are connected to each other by the data  
30    link (17).

8.     A method for operating a communication system comprising at least one  
communication device (12) capable of communicating with a telecommunica-  
tions network (10), in particular for operating a communication system  
35    according to claim 1 or 2, characterized by:

      -     providing at least two logical communication devices in the communica-  
tion device (12),

- 1       - assigning the communication device (12) to one of the at least two logical communication devices, and
- storing individual information related to the communication device (12) assigned to the one of the at least two logical communication devices to enable a personalized multi-user usage of the communication device (12).
- 5

9. The method according to claim 8, characterized by:

- connecting a first communication device (11) to the second communication device (12) assigned to one of the logical communication devices therein via a data link (17) for information transfer,
- 10       - transferring individual information of the first communication device (11) to the second communication device (12) as individual information related to the latter one, and
- storing the transferred individual information from the first communication device (11) in the second information device (12) for being used therein together with the assigned logical communication device.
- 15

10. The method according to claim 8, wherein the communication system comprises first and second communication devices (11, 12) each capable of communicating with the telecommunications network (10), and both being connectable to each other by a data link (17) for information transfer, characterized in that:

20

- the logical communication devices are provided in the second communication device (12),
- 25       - a first communication device (11) connected to the second communication device (12) via the data link (17) is assigned to one of the logical communication devices, and
- individual information of the first communication device (11) is transferred to the second communication device (12) when the first and the second communication devices (11, 12) are connected to each other by the data link (17) for being used in the second communication device (12) together with the logical communication device assigned to the first communication device (11).
- 30

35 11. The method according to claim 9 or 10, characterized in that the information transfer is performed in response to a respective request input by the user.

- 1     **12.** A method for operating a communication system comprising first and  
second communication devices (11, 12) each capable of communicating with a  
telecommunications network (10), and both being connectable to each other  
by a data link (17) for information transfer, in particular for operating a com-  
5     munication system according to claim 1 or 2, wherein the second communica-  
tion device (12) is connectable to the telecommunications network (10) using  
the identity of the first communication device (11) when the first and the  
second communication devices are connected to each other by the data link  
(17), characterized by:
- 10     -     keeping the connection between the first and the second communication  
devices (11, 12) active, if the second communication device (12), that is con-  
nected to the telecommunications network (10) using the identity of the first -  
communication device (11), is made passive to enter a stand-by mode in  
which the connection to the telecommunications network (10) is interrupted.
- 15     **13.** The method for operating a communication system according to claim  
12, characterized in that entering the stand-by mode is performed by actuat-  
ing a specific input means (18').
- 20     **14.** A method for operating a communication system comprising first and  
second communication devices (11, 12) each capable of communicating with a  
telecommunications network (10), and both being connectable to each other  
by a data link (17) for information transfer, in particular for operating a com-  
25     munication system according to claim 1 or 2, wherein the second communica-  
tion device (12) is connectable to the telecommunications network (10) using  
the identity of the first communication device (11) when the first and the  
second communication devices (11, 12) are connected to each other by the  
data link (17), characterized by:
- 30     -     forwarding data that are received by the second communication device  
(12) from the telecommunications network (10) to the first communication de-  
vice (11) via the data link (17), if the second communication device (12) is  
connected to the telecommunications network (10) using the identity of the  
first communication device (11).
- 35     **15.** The method for operating a communication system according to claim  
14, characterized in that forwarding data from the second communication de-

1      vice (12) to the first communication device (11) is indicated to a user by the  
second communication device (12).

5

10

15

20

25

30

35

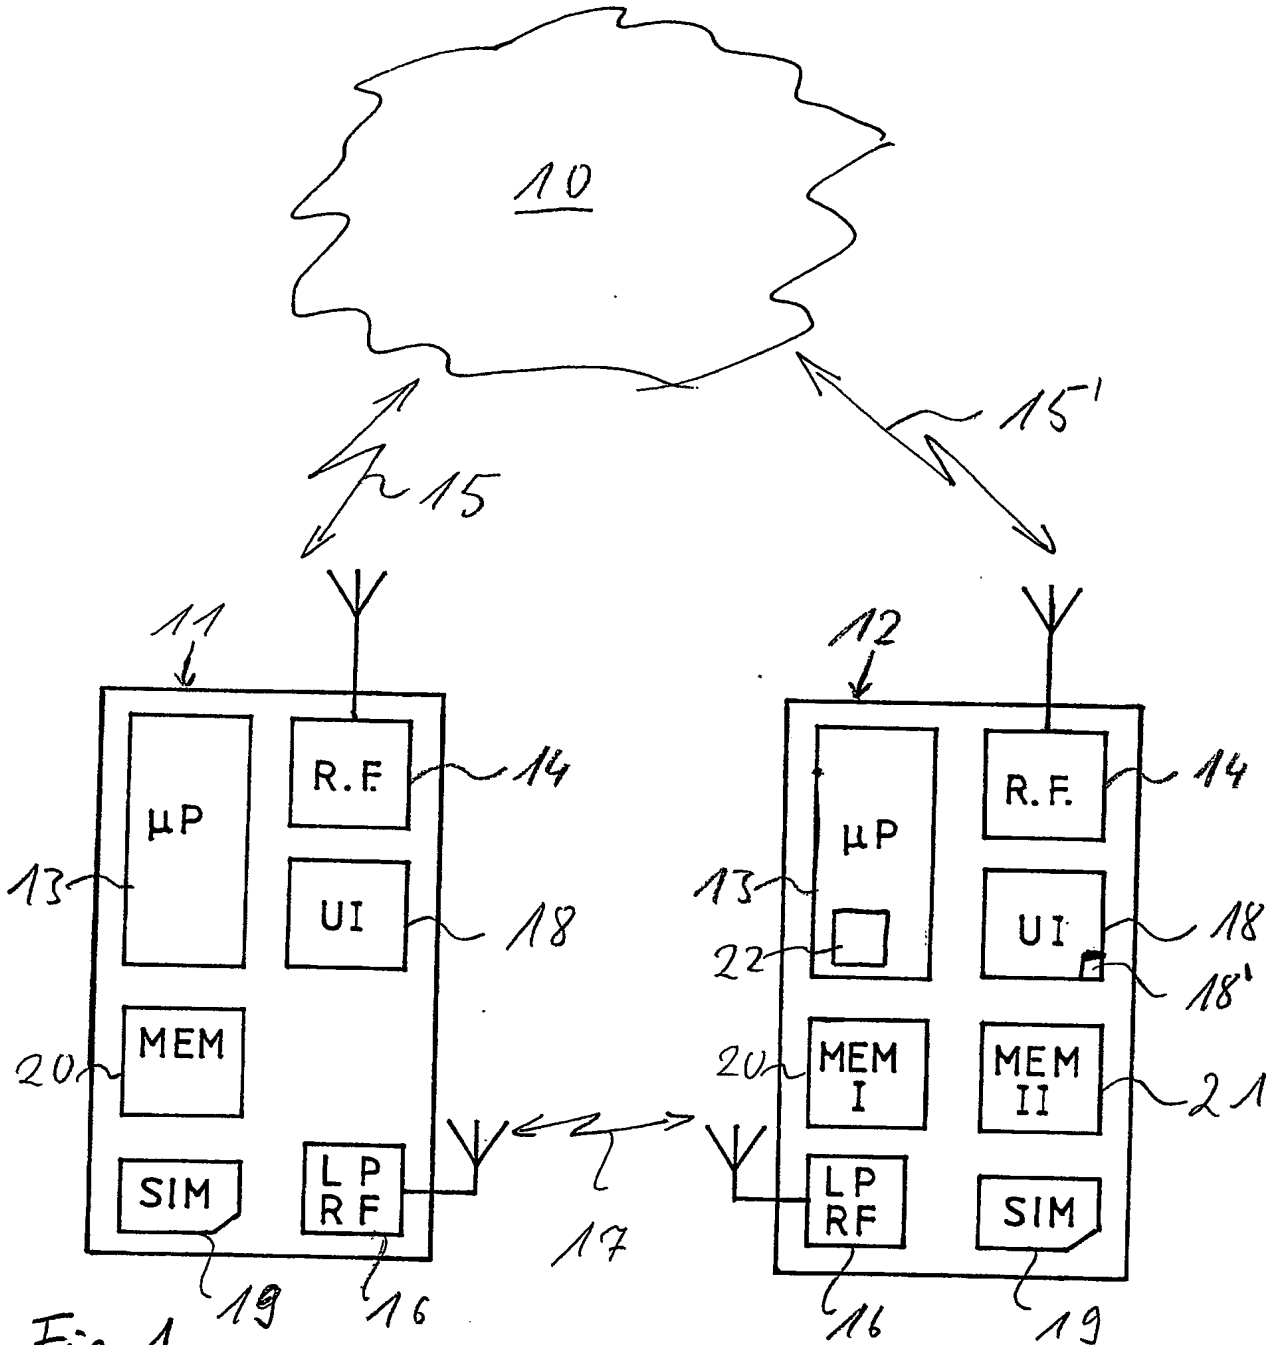


Fig. 1



# INTERNATIONAL SEARCH REPORT

Intern: Application No  
/IB 02/05553

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04Q7/32

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EP0-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 378 450 A (TECHNOPHONE LTD) 18 July 1990 (1990-07-18) page 8, line 49 -page 9, line 7 abstract	1-3,5-11
X	--- US 5 524 276 A (LITTIG STEFAN G ET AL) 4 June 1996 (1996-06-04) page 4, line 54 - line 67	1-3,5-7
X	--- WO 02 23933 A (FRANK BERNARD ;HAIN RONALD (DE); GABLER DIETRICH (DE); KLEIN BERNH) 21 March 2002 (2002-03-21) abstract; figure 1	1,2,8-11
X	--- WO 02 21867 A (HILTUNEN MISHA ;TUOMINEN HEIKKI (DE); NOKIA MOBILE PHONES LTD (FI)) 14 March 2002 (2002-03-14) abstract	1,2
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier document but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.  
"&" document member of the same patent family

Date of the actual completion of the international search

17 July 2003

Date of mailing of the international search report

- 4 AUG 2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

MARKUS STÄLÖ/MN

# INTERNATIONAL SEARCH REPORT

Intern: Application No  
T/IB 02/05553

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0378450	A	18-07-1990	GB 2229340 A DE 69000003 D1 DE 69000213 D1 DE 69000213 T2 DK 406985 T3 DK 378450 T3 EP 0406985 A2 EP 0378450 A2 US 5259018 A US 5839051 A	19-09-1990 12-12-1991 27-08-1992 24-12-1992 31-08-1992 23-12-1991 09-01-1991 18-07-1990 02-11-1993 17-11-1998
US 5524276	A	04-06-1996	CA 2059845 A1 GB 2253545 A ,B HK 1000529 A1 MX 9200403 A1	31-07-1992 09-09-1992 03-04-1998 01-07-1992
WO 0223933	A	21-03-2002	DE 10045303 A1 AU 8380001 A WO 0223933 A1 EP 1317864 A1	18-04-2002 26-03-2002 21-03-2002 11-06-2003
WO 0221867	A	14-03-2002	AU 9582501 A BR 0112972 A CA 2419257 A1 EP 1317866 A2 WO 0221867 A2	22-03-2002 24-06-2003 14-03-2002 11-06-2003 14-03-2002
GB 2365699	A	20-02-2002	DE 10012057 A1 FR 2806568 A1 IT MI20010481 A1	20-09-2001 21-09-2001 09-09-2002
DE 10100824	A	11-07-2002	DE 10100824 A1 WO 02056620 A1	11-07-2002 18-07-2002
US 5659594	A	19-08-1997	JP 3109829 A CA 2026093 A1	09-05-1991 26-03-1991

## INTERNATIONAL SEARCH REPORT

Intern:

Application No

/IB 02/05553

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 365 699 A (BOSCH GMBH ROBERT) 20 February 2002 (2002-02-20) abstract	1-15
A	DE 101 00 824 A (SIEMENS AG) 11 July 2002 (2002-07-11) abstract	1-15
A	US 5 659 594 A (TODA YOSHIFUMI) 19 August 1997 (1997-08-19) abstract	1-15